




Asus U47VC-DS51 Motherboard Replacement

If you have slow computer speeds and frequent computer crashes, then you should replace your motherboard.

Written By: Murphy Villegas

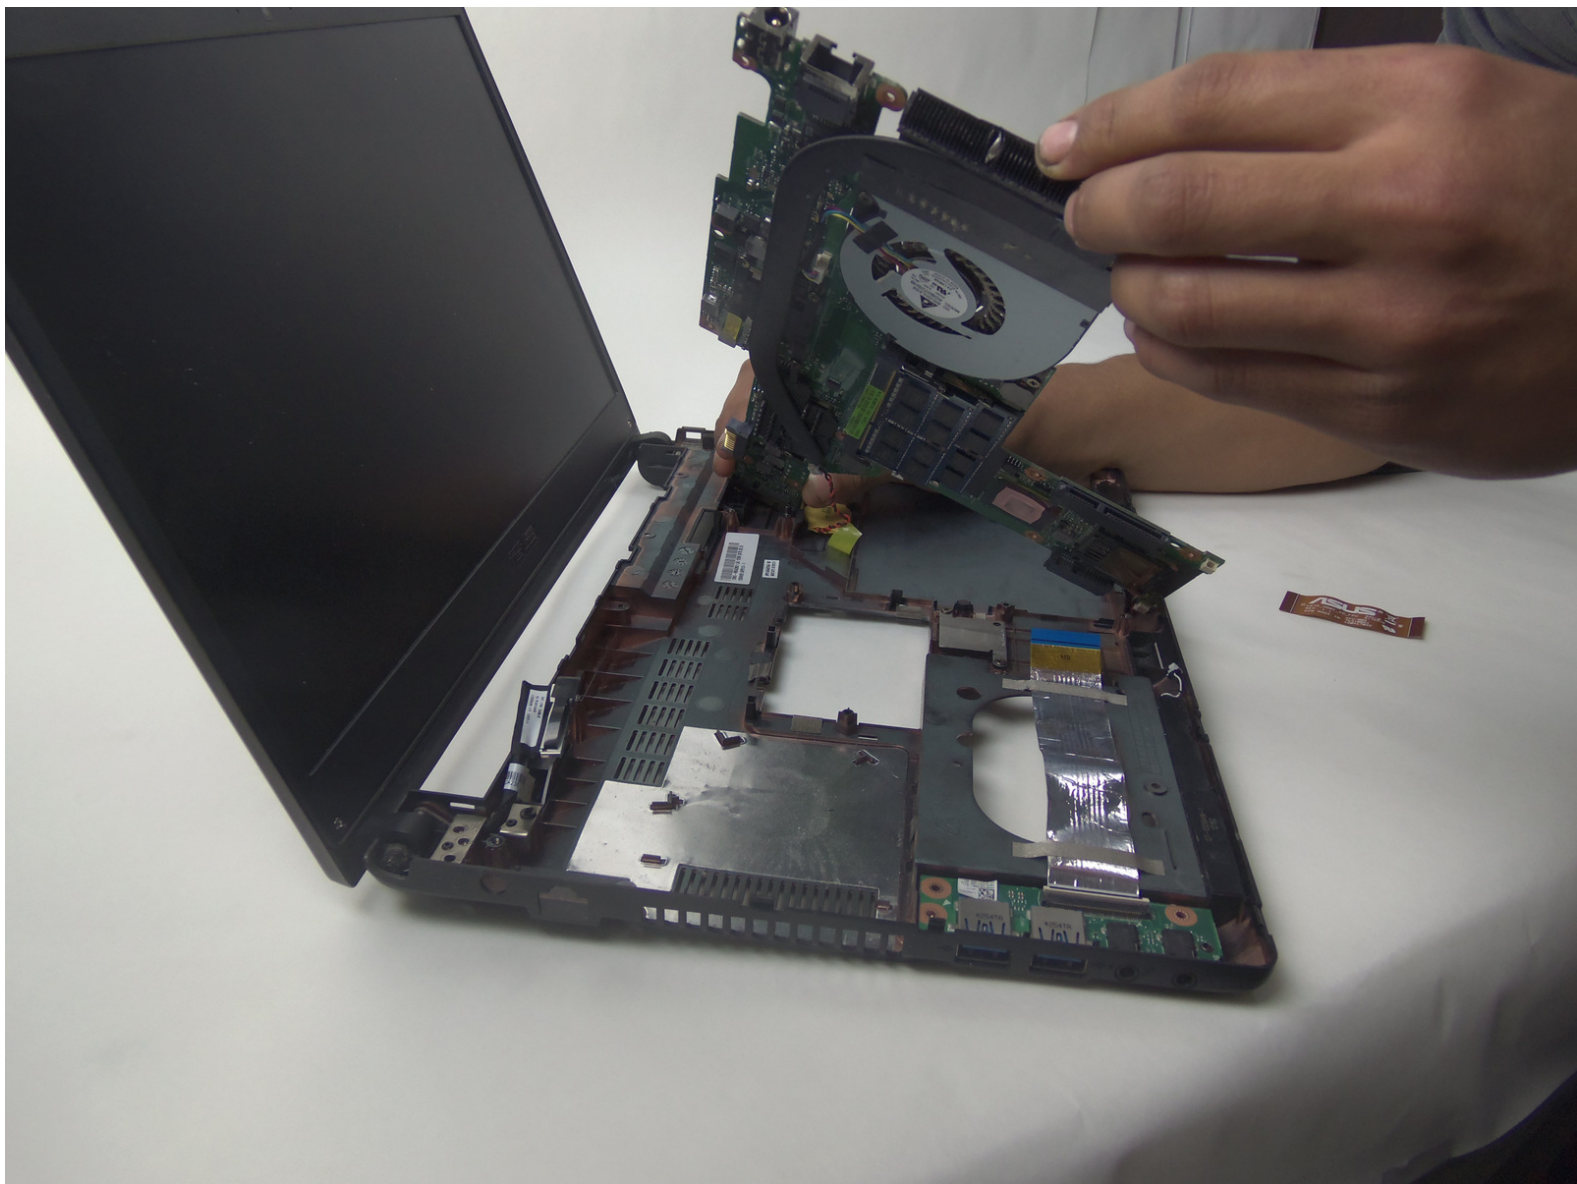

INTRODUCTION


This guide shows how to completely take out the motherboard for a total replacement.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Hard Drive

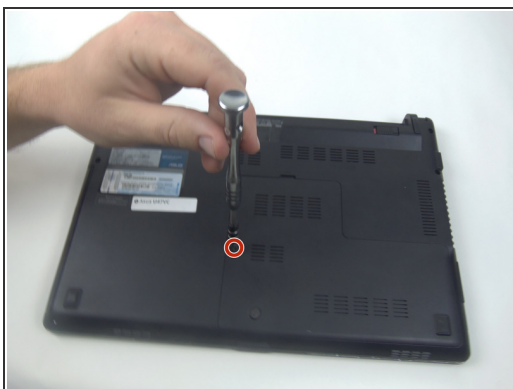

- Remove the hard drive cover.
 - Unscrew one 8mm Phillips #00 screw.
- Using the black spudger, insert its flat end under the hard drive's covering, working around to pry it off.

Step 2



- Remove the hard drive.
 - Unscrew the four 3mm Phillips #00 screws.
- Pull the hard drive's black tab away from the laptop to free it.


Step 3 — Keyboard




- Using the black spudger, insert its flat end between the crevice where the color changes from grey to black.

 The keyboard is very tightly secured.

- Carefully ease the spudger's end along the crevice, going around the entire frame.


 The back connectors are short, so be careful when lifting.

Step 4

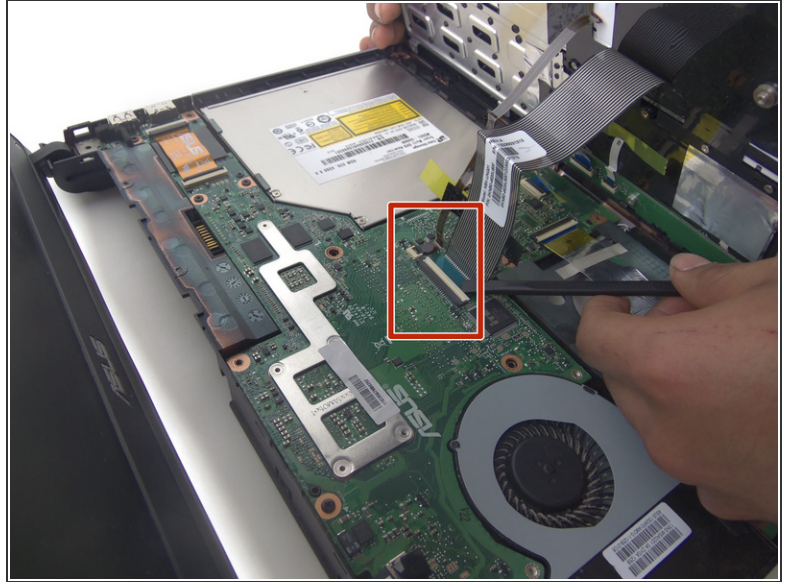

- Lift the keyboard from the front where it is closest to the screen.
- Disconnect the large and small ZIF connectors attached to the motherboard by flipping the light-colored part of the switch.

Step 5

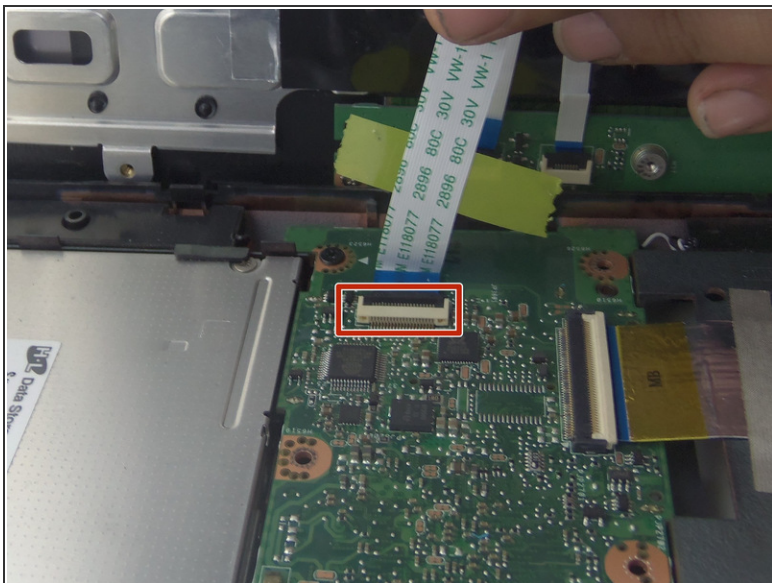


- Remove the third and last ZIF connector on the motherboard by flipping up the dark-colored part of the switch.
- Now, the component should come completely free.

Step 6 — Motherboard




- Unscrew the one 8mm screw using a Phillips #00.
- Using the black spudger, slightly pry up on the tab and gently pull the optical drive away from the laptop in order to remove it.

Step 7

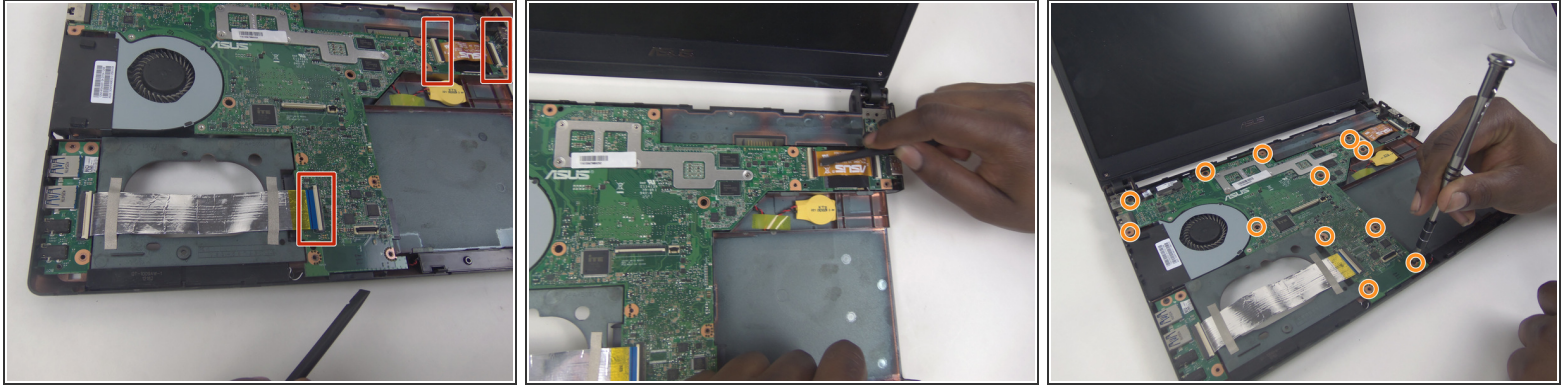

- Using the black spudger, slowly lift up on the cable connectors and pull them away from the connectors.
- ⓘ Repeat steps on both cables.
- Unscrew the 12 8mm screws using a Phillips #00 screwdriver.

Step 8

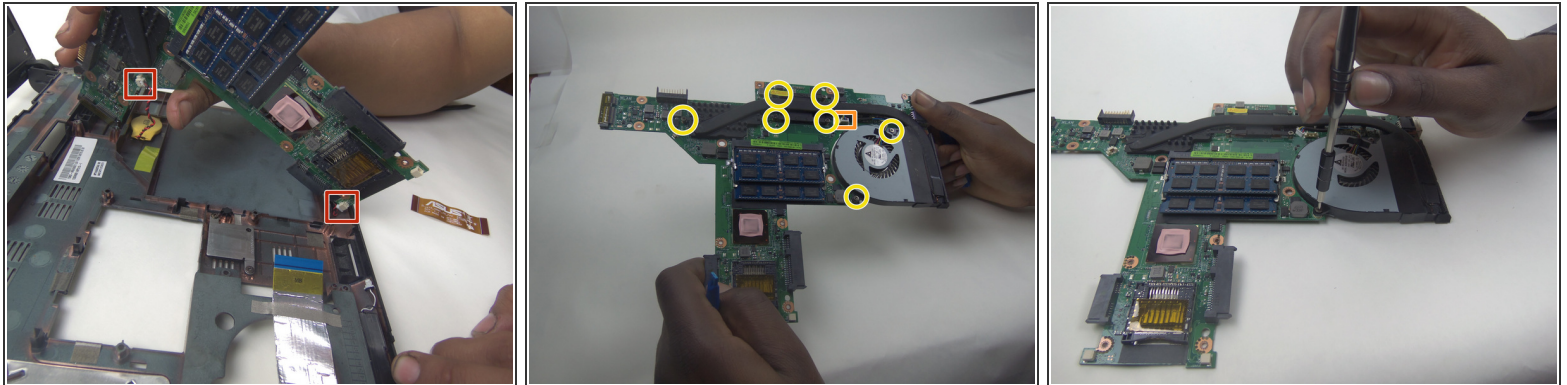

- Lift up on the motherboard and disengage the two connectors.
- Disconnect the cooling fan connector.
- Unscrew the 7 8mm screws holding in the cooling fan using a Phillips #00 screwdriver.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 05:44:05 AM.